
STANDARD CONFIGURATION SPECS

THESE ARE THE DEFAULT SPECS THAT ARE INCLUDED IN THE BASE CONFIGURATION OF THIS MODEL.

U6 60" SINGLE AXLE CHANNEL UTILITY

WI Deck Width: 60"	E Deck Height: 21"	Axle: Single (3,500 lbs.)
Length: 8' - 10'	Couplers: Bumper Pull & Pintle	ी Load Capacity: 1,990 - 3,995 lbs.
5 GVWR: 2,990 - 4,995 lbs.	Weight: 900 - 1,000 lbs.	Choose the optional Side Mount ATV Gates to enhance accessibility and convenience when loading and unloading ATVs.



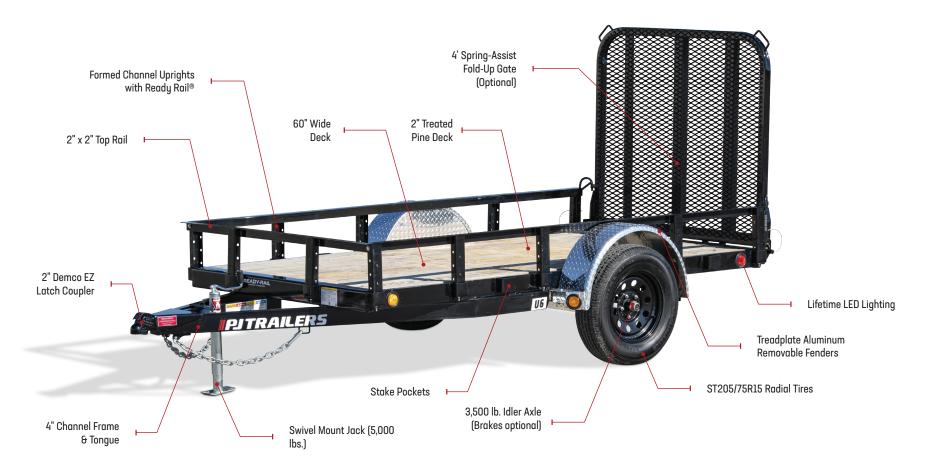

Safely and easily load your equipment or perform maintenance with our Removable Aluminum Trendolate Fenders

REMOVABLE ALUMINUM TREADPLATE



With the Side Mount ATV Ramp option, load an ATV in the front or rear between fenders, utilizing removable frame rail ramps for convenient side access, catering to diverse loading needs.

VERSATILE ATV SIDE RAMP OPTION



Ready Rail®, our patented rail system, empowers users to tailor their trailer with bolt-on accessories, ensuring a versatile solution that evolves with your changing needs. Available exclusively on P I Trailers.

READY RAIL® - CUSTOMIZABL ADAPTABLE



Experience the advantage of additional factoryinstalled fastening solutions, such as D-Rings, Tie-Downs, and Stake Pockets, ensuring versatile and secure cargo management for all unur transport needs.

ADVANCED CARGO SECUREMENT

